




## China Lm8uu Bearing Supplier

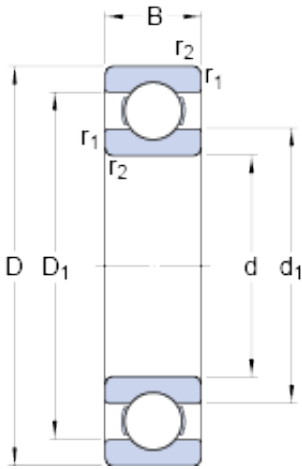

6324/C3vI2071 Bearing 2D drawings and 3D CAD models

### SKF Insocoat Bearings, Electrical Insulation Bearings 6324/C3vI2071 Insulated Bearing

Bearing No. 6324/C3vI2071

Size	260x120x55 mm
Bore Diameter	260 mm
Outer Diameter	120 mm
Width	55 mm
d	120 mm
D	260 mm
B	55 mm
d <sub>1</sub>	164.6 mm
D <sub>1</sub>	214.7 mm
r <sub>1,2</sub> - min.	3 mm
d <sub>a</sub> - min.	134 mm
d <sub>a</sub> - max.	158 mm
D <sub>a</sub> - max.	246 mm
r <sub>a</sub> - max.	2.5 mm
Basic dynamic load rating - C	208 kN
Basic static load rating - C <sub>0</sub>	186 kN
Fatigue load limit - P <sub>u</sub>	5.7 kN
Reference speed	5600 r/min
Limiting speed	3400 r/min
Calculation factor - k <sub>r</sub>	0.03
Calculation factor - f <sub>0</sub>	14
Category	Single Row Ball Bearings
Inventory	0.0
Manufacturer Name	SKF



## China Lm8uu Bearing Supplier

Minimum Buy Quantity	N/A
Weight / Kilogram	12.461
EAN	7316571861753
Product Group	B00308
Enclosure	Open
Precision Class	ABEC 1   ISO P0
Maximum Capacity / Filling Slot	No
Rolling Element	Ball Bearing
Snap Ring	No
Internal Special Features	Electrical Insulation on Inner Ring
Cage Material	Steel
Internal Clearance	C3-Loose
Inch - Metric	Metric
Long Description	120MM Bore; 260MM Outside Diameter; 55MM Outer Race Width; Open; Ball Bearing; ABEC 1   ISO P0; No Filling Slot; No Snap Ring; Electrical Insulation on Inner Ring Internal Special Features; C3-Loose I
Other Features	Deep Groove   VL2071 INSOCOAT Bearing with Coated Inner Ring
Category	Single Row Ball Bearing
UNSPSC	31171504
Harmonized Tariff Code	8482.10.50.68
Noun	Bearing
Keyword String	Ball
Manufacturer URL	<a href="http://www.skf.com">http://www.skf.com</a>
Manufacturer Item Number	6324/C3VL2071
Weight / LBS	12.5
Outside Diameter	10.236 Inch   260 Millimeter
Outer Race Width	2.165 Inch   55 Millimeter



## China Lm8uu Bearing Supplier

Bore	4.724 Inch   120 Millimeter
Inner Race Width	0 Inch   0 Millimeter
bore diameter:	120 mm
static load capacity:	186 kN
outside diameter:	260 mm
precision rating:	Not Rated
overall width:	55 mm
finish/coating:	Aluminum Oxide
bore type:	Round
outer ring width:	55 mm
closure type:	Open
fillet radius:	2.5 mm
snap ring included:	Without Snap Ring
maximum rpm:	3400 RPM
internal clearance:	C3
series:	63
dynamic load capacity:	208 kN
resistance features:	Current-Insulating Coating
$d_1$	164.6 mm
$D_1$	214.7 mm
$r_{1,2}$ min.	3 mm
$d_a$ min.	134 mm
$d_a$ max.	158 mm
$D_a$ max.	246 mm
$r_a$ max.	2.5 mm
Basic dynamic load rating C	208 kN
Basic static load rating $C_0$	186 kN
Fatigue load limit $P_u$	5.7 kN
Calculation factor $k_r$	0.03
Calculation factor $f_0$	13.5
Mass bearing	12.5 kg