




## China Lm8uu Bearing Supplier

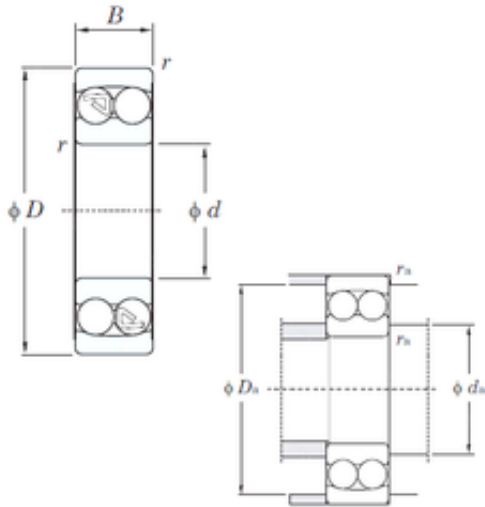

1212 Bearing 2D drawings and 3D CAD models

SKF NSK Timken Koyo NTN Aligning Ball  
Bearing 1212 1213 1214 1215 1216etn9 Ektn9 /C3  
M K 2210 2211 2212 2213 2214 Etn9 Ektn9  
E-2RS1tn9/C3

Bearing No. 1212

Size	60x110x22 mm
Bore Diameter	60 mm
Outer Diameter	110 mm
Width	22 mm
d	60 mm
D	110 mm
B	22 mm
C	22 mm
r min.	1.5 mm
da min.	68 mm
Da max.	102 mm
ra max.	1.5 mm
Weight	0.900 Kg
Basic dynamic load rating (C)	30.2 kN
Basic static load rating (C0)	11.5 kN
(Grease) Lubrication Speed	5200 r/min
(Oil) Lubrication Speed	6400 r/min
Calculation factor (e)	0.19
Calculation factor (Y0)	3.53
Calculation factor (Y1)	3.37
Category	Self Aligning Ball Bearings
Inventory	0.0
Manufacturer Name	KOYO



## China Lm8uu Bearing Supplier

Minimum Buy Quantity	N/A
Weight / Kilogram	0.973
Product Group	B00152
Mounting Method	Shaft
Enclosure	Open
Rolling Element	Ball Bearing
Cage Material	Steel
Precision Class	ABEC 1   ISO P0
Internal Clearance	C0-Medium
Number of Rows of Balls	Double Row
Other Features	Allowable Misalignment 2.5 Deg
Long Description	60MM Bore; Shaft Mount; 110MM Outside Diameter; 22MM Inner Race Width; 22MM Outer Race Width; Open; Steel Cage; Double Row of Balls; ABEC 1   ISO P0; C0-Medium
Inch - Metric	Metric
Category	Self Aligning Ball Bearings
UNSPSC	31171532
Harmonized Tariff Code	8482.10.50.68
Noun	Bearing
Keyword String	Self Aligning
Manufacturer URL	<a href="http://www.koyousa.com">http://www.koyousa.com</a>
Weight / LBS	1.98416
Outer Race Width	0.866 Inch   22 Millimeter
Outside Diameter	4.331 Inch   110 Millimeter
Inner Race Width	0.866 Inch   22 Millimeter
Bore	2.362 Inch   60 Millimeter
Bearing No.	1212
r(min)	1.5
Cr	30.2



## China Lm8uu Bearing Supplier

C0r	11.6
Cu	0.73
Grease lub.	5200
Oil lub.	6400
da(min)	68
Da(max)	102
ra(max)	1.5
e	0.19
Y1	3.37
Y2	5.22
Y0	3.53
(Refer.)Mass(kg)	0.900